Decking beams CTD

Positive locking in the curtainsider.



The max. loading capacity of this decking beam depends on the length of the side beams (x dimension).

„X“ Internal dimension / tolerance ± 1mm

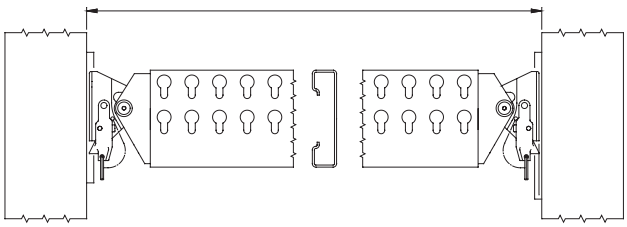

Length CTD-side beam	Decking beam load capacity
X = 0 – 2499 mm	PL 400 kg
X = 2500 mm – 2999 mm	PL 300 kg
X = 3000 mm – 3500 mm	PL 200 kg

Load capacity PL

1 - Load capacity	2 - Product identification sticker	Order code
BC 800 Adjustment range from 2210 to 2530 mm.		Internal dimension xxxx mm
PL 400 kg per Europallet space		510800-10
PL 300 kg per Europallet space		510800-11
PL 200 kg per Europallet space		510800-12

Product identification sticker

✓	2 - Product identification sticker	Order code
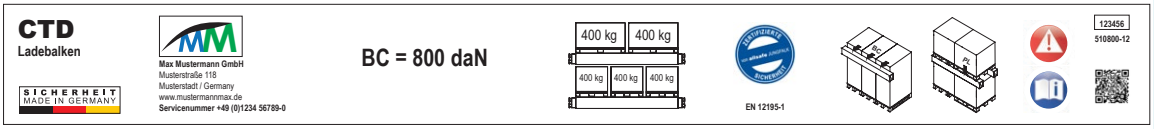		
Customized product label with your logo		Custom sticker
Product label		allsafe sticker

Sample order code

510800-10	-	allsafe sticker

allsafe
Member of allsafe GROUP